


## Eclipse Ultimate DIN Lock Range Euro Sashlock Radius 60mm



### Technical Information

- CE 2812, CF 10208 Certifire
- BS EN12209 Performance Tested
- Tested To 200,000 Cycles at 120nm
- BS EN1634 Fire Tested
- FD 30, 60, 90, 120 Minute Timber
- FD 240 Minute Steel
- 60mm Backset
- 22mm Forend
- 1 Piece Forend (3mm Thick)
- 304 Stainless Forend, Latch Bolt, Dead Bolt, Follower, Strike Plate
- 12mm Latch, 20mm Dead bolt
- Double Throw Dead bolt
- Intumescent must be used with the product for fire door compliance

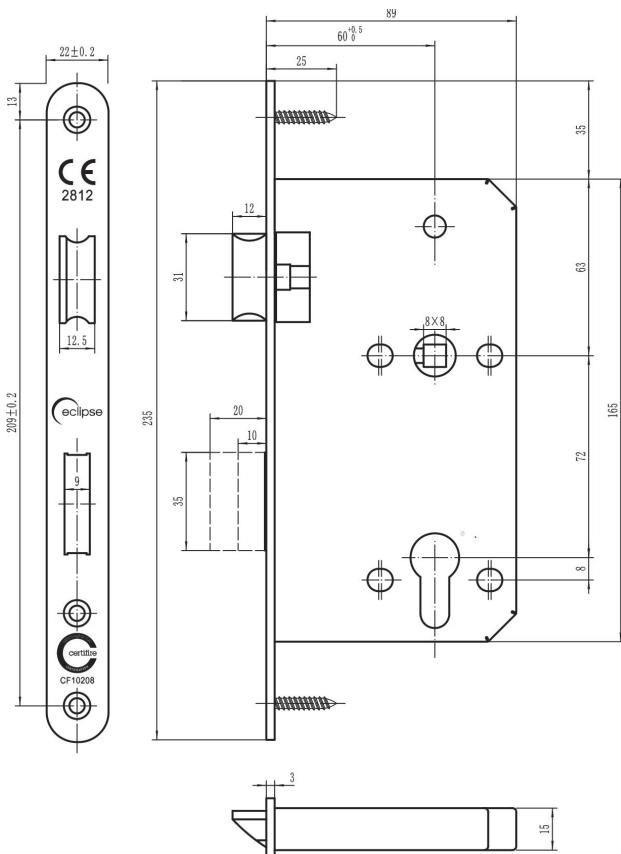

Ref	B/Set	Forend	Profile	Finish
71420	60mm	22mm	Radius	SSS

71408	Anti-Rattle Strike	Radius	SSS
-------	--------------------	--------	-----

	2812	CF10208 24
EN12209:2003	3 X 8 1	0 G 3 B C 2 0