


Eclipse Ultimate DIN Lock Range Nightlatch Radius 60mm



Technical Information

- CE 2812, CF 10208 Certifire
- BS EN12209 Performance Tested
- Tested To 200,000 Cycles at 120nm
- BS EN1634 Fire Tested
- FD 30, 60, 90, 120 Minute Timber
- FD 240 Minute Steel
- 60mm Backset
- 22mm Forend
- 1 Piece Forend (3mm Thick)
- 304 Stainless Forend, Latch Bolt, Follower, Strike Plate
- 12mm Latch
- Half Set Handle Operation
- Intumescent must be used with the product for fire door compliance

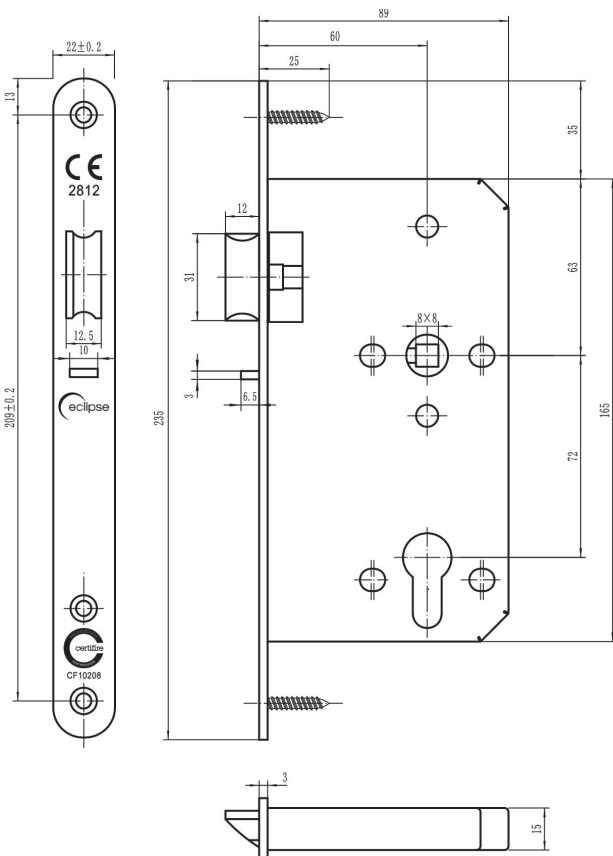

Ref	B/Set	Forend	Profile	Finish
71424	60mm	22mm	Radius	SSS

71409	Anti-Rattle Strike	Radius	SSS
-------	--------------------	--------	-----

	2812	CF10208
		24
EN12209:2003	3 X 8 1 0 G 1 B B 2 0	